



## Switched Rack PDU AP7920B

### Overview


The APC Switched Rack Power Distribution Unit (PDU) distributes power to devices in the rack. It has a sensor that measures the current that it and its attached devices use. It can be monitored through Web, Telnet, SNMP, SSH, or EcoStruxure™ IT Expert interfaces.

**Inlet:** The Rack PDU has an IEC-320-C14 inlet on the front of the unit to connect to the power cord.

**Outlets:** The outlets connect the Rack PDU to equipment in your rack or enclosure. Each outlet allows independent control of the connected equipment and the Rack PDU firmware also provides Outlet User accounts. The Rack PDU has eight IEC-320-C13 outlets.

**Digital display:** A digital display shows aggregate current being used.

**Power cord:** The power cord connects the Rack PDU to one power source. The cord connects to the front of the Rack PDU for easier mounting and user access. The 8 ft (2.4 m) cord terminates with a C14 plug.

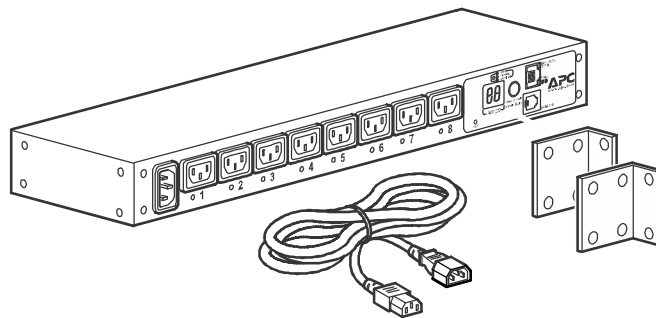

## Specifications

<b>Electrical</b>	
Input connectors	IEC-320-C14 inlet
Output connectors	Eight IEC-320-C13 outlets
Cord length	8 ft (2.4 m)
Acceptable input voltage	200–240 VAC
Input frequency	50/60 Hz
Maximum current	12A max total; 12A max/outlet (UL) 10A max total; 10A max/outlet (IEC)
<b>Physical</b>	
Size (H × W × D)	1.73 × 17.50 × 4.25 in (4.45 × 44.45 × 10.80 cm)
Weight	5 lb (2.26 kg)
Shipping weight	7.6 lb (3.4 kg)
<b>Environmental</b>	
Elevation (above MSL): Operating: Storage:	0 to 10,000 ft (0 to 3000 m) 0 to 50,000 ft (0 to 15 000 m)
Temperature: Operating: Storage:	23 to 113° F (–5 to 45° C) –13 to 149° F (–25 to 65° C)
Humidity: Operating: Storage:	5 to 95%, non-condensing 5 to 95%, non-condensing
<b>Compliance</b>	
Safety	cULus-EU, CE, EAC, RCM, CMIM, UKCA
EMC	EN55024, EN55032, AS/NZS CISPR 32