



SANTAK® Battery

Castle Battery

C12-9AH


PRODUCT FEATURES

STK CASTLE series battery uses high magnification lead paste formulations and high corrosion resistant alloy multi-grid, and special exhaust structure and sealing technology. It has many excellent features like high discharge capacity, long life, safe and reliable, very low self-discharge rate, flexible installation, convenient maintenance etc.



APPLICATION


For Network connection equipment, power system, UPS, power station systems, railway and marine systems.




SPECIFICATION

Nominal Voltage	12V
Nominal Capacity(20HR)	9 Ah
Dimension	Length: 151mm (5.94 in.) Width: 65mm (2.56 in.) Total Height (with Terminal): 99mm (3.90 in.)
Approx Weight	2.50 Kg (5.51 lbs)
Terminal	T2
Container Material	ABS
Max. Discharge Current	127.5A (5s)
Internal Resistance	16~24.0mΩ
Operating Temp.Range	Discharge: -20°C~55°C (-4 °F~131 °F) Charge: 0°C~40°C (32 °F~104 °F) Storage: -15°C~50°C (5 °F~122 °F)
Nominal Operating Temp. Range	25°C±3°C (77 °F±5 °F)
Standby Use (25°C)	Charging Current: ≤2.7A Charging Voltage: 13.5V~13.8V Temp. Coefficient: -3mV/cell/°C
Capacity affected by Temperature	40°C (104 F) : 106% 25°C (77 F): 100% 0°C (32 F): 86%
Self Discharge	≤2% per month at 20°C

DIMENSIONS

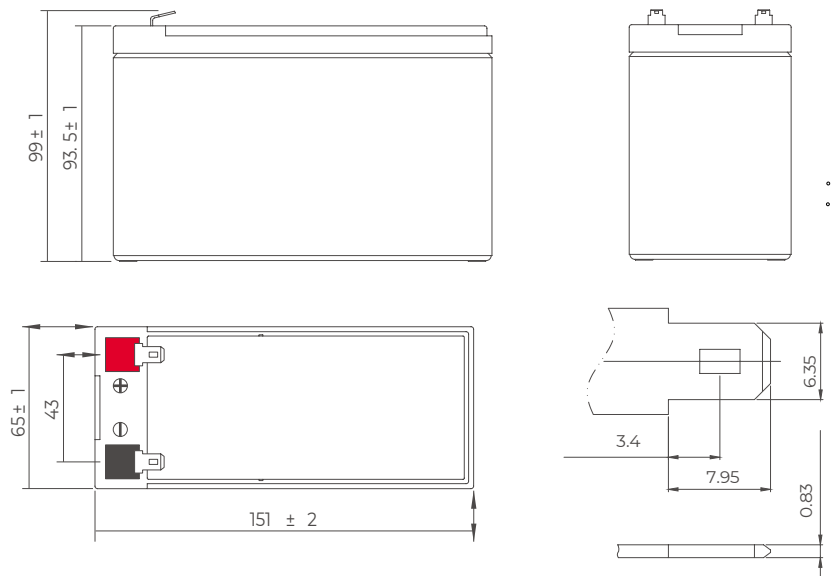

DISCHARGE CHARACTERISTICS

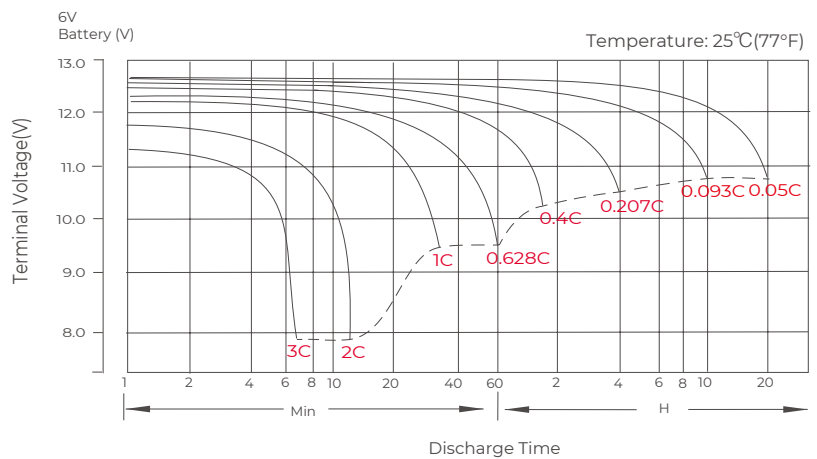

Constant Current Discharge (Amperes) at 25 °C (77 F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	30.0	21.0	16.7	12.7	9.8	7.35	5.68	3.36	2.69	2.01	1.59	1.33	1.14	0.91	0.740	0.403
1.80V/cell	33.0	23.5	17.4	13.2	10.3	7.60	6.00	3.68	2.93	2.18	1.72	1.43	1.22	0.97	0.801	0.435
1.75V/cell	36.0	24.0	18.2	13.8	10.4	7.85	6.03	3.80	3.01	2.24	1.76	1.46	1.25	0.99	0.808	0.438
1.70V/cell	39.0	25.0	18.9	14.3	10.8	8.10	6.20	3.93	3.11	2.30	1.80	1.50	1.28	1.00	0.822	0.441
1.67V/cell	42.0	25.5	19.3	14.9	11.2	8.35	6.28	4.00	3.16	2.34	1.83	1.51	1.29	1.01	0.826	0.448
1.60V/cell	45.0	26.5	19.5	15.4	11.6	8.60	6.40	4.18	3.29	2.42	1.89	1.56	1.33	1.04	0.843	0.452

Constant Power Discharge (Watts/cell) at 25 °C (77 F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	58.6	41.5	32.2	25.1	19.30	14.35	11.30	9.37	7.35	4.87	3.93	3.35	2.64	2.05	1.83	1.24
1.80V/cell	62.0	43.8	33.9	26.0	20.50	15.00	11.50	9.56	7.47	4.94	4.01	3.42	2.67	2.07	1.84	1.25
1.75V/cell	64.0	45.3	35.0	27.2	20.80	15.65	11.94	9.75	7.55	5.00	4.10	3.50	2.71	2.10	1.85	1.26
1.70V/cell	68.0	47.2	36.0	28.3	21.50	16.30	12.40	9.94	7.66	5.07	4.17	3.53	2.73	2.12	1.86	1.27
1.67V/cell	70.6	48.7	36.5	29.5	22.30	16.95	12.60	10.13	7.74	5.13	4.25	3.60	2.76	2.14	1.87	1.28
1.60V/cell	73.6	50.3	37.0	30.6	23.00	17.60	12.80	10.32	7.95	5.20	4.32	3.65	2.81	2.17	1.88	1.290

CASTLE BATTERY C12-9AH TYPICAL CURVES


Float Charging Characteristics

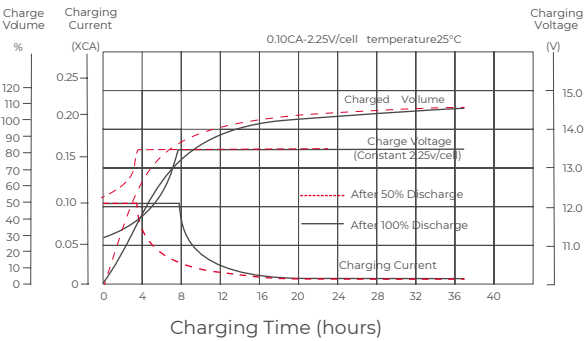


Temperature Effects in Relation to Battery Capacity

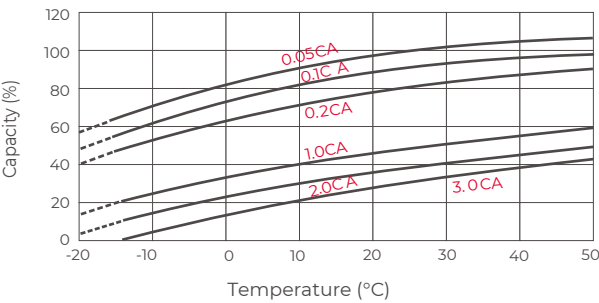


Effect of Temperature on Long Term Float Life

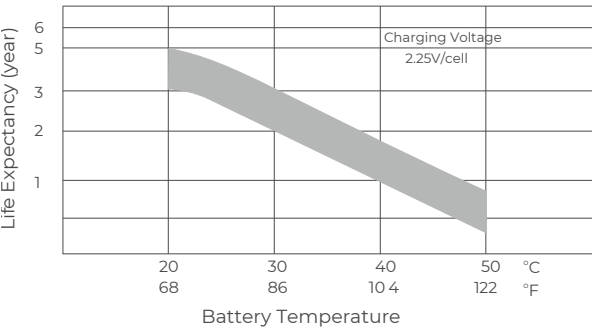

Cycle Life in Relation to Depth of Discharge

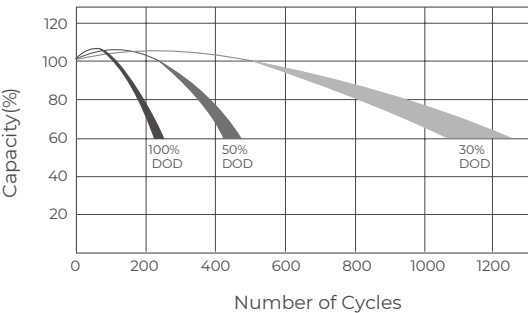

Self Discharge Characteristics

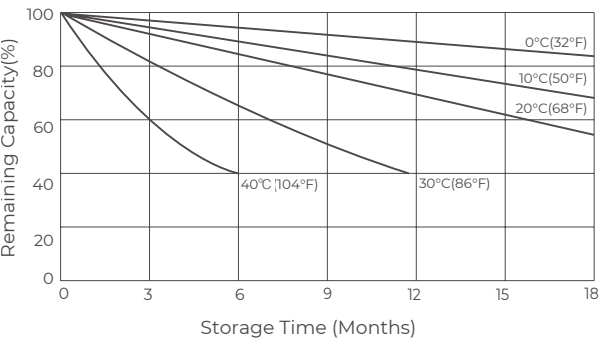

SANTAK ELECTRONIC (SHENZHEN) CO., LTD.

Shenzhen, P.R. China

Address: No. 8 Baoshi Road, Baoan
District, Shenzhen, 518101

Tel: 0086 755 27572666

Fax: 0086 755 27572730 (27572480)

Email: santakexport@santak.com

Website: www.santak.com

October. 2025 EN-00014-01